



## America's #1 Turf Equipment Lift



The Patented GL-9 is now "**Certified**" to the rigid OSHA recognized ANSI/ALI ALCTV-2006 turf/auto lift standard. This new ANSI standard is the only standard that provides inclusion for lifting turf equipment. The GL-9, America's #1 Turf Equipment Lift, passed this validation process and has earned the right to wear the ALI/ETL Gold Label shown above.



800-788-9789  
[www.golf-lift.com](http://www.golf-lift.com)





## The Model GL-9

comes as a complete system for lifting by the tires or by the frame. Accomplish all your lifting needs from walk mowers, triplexes, fairway mowers, and large rough cut mowers to full-size trucks. With no options to buy, the GL-9 is the most flexible and complete Lift System in the industry.

### The Patented GL-9 with the Tire-Wedge Turf Arm System

Golf-Lift's patented GL-9 with the Tire-Wedge™ Turf Arm System pivots from the column, telescopes directly to the tire and adjusts to the tire size. This system requires no changing of adapters to change vehicles. From walkers (which can be loaded up to 4 at a time) to 3 & 4 wheel equipment the GL-9 provides total turf vehicle coverage up to 9,000-lb. capacity. The Tire-Wedge allows the GL-9 to expose the entire undercarriage of the vehicle and creates the most obstacle-free working environment in the industry. Maximum productivity is achieved by taking up the least amount of floor space and removing all obstacles found on other lifts. The GL-9 eliminates all protruding beams, ramps, runways and overhead beams found on other units. It is simply wide open for the technician to work around.


### No Beam Obstacle

The GL-9 has NO Overhead beam to interfere with roll bars (ROP's), canopies or low ceilings and provides easier installation. This design (over 30 years in service) never limits your lifting height and means operators never waste time repositioning vehicles with canopies or roll bars to miss an overhead beam. Why have the obstacle if you don't need it? Our Low Profile floor cover is the lowest in the industry at 1' tall and is gently ramped for rolling oil drains, jacks and tool boxes over with ease.

# The Original



## Get It Up

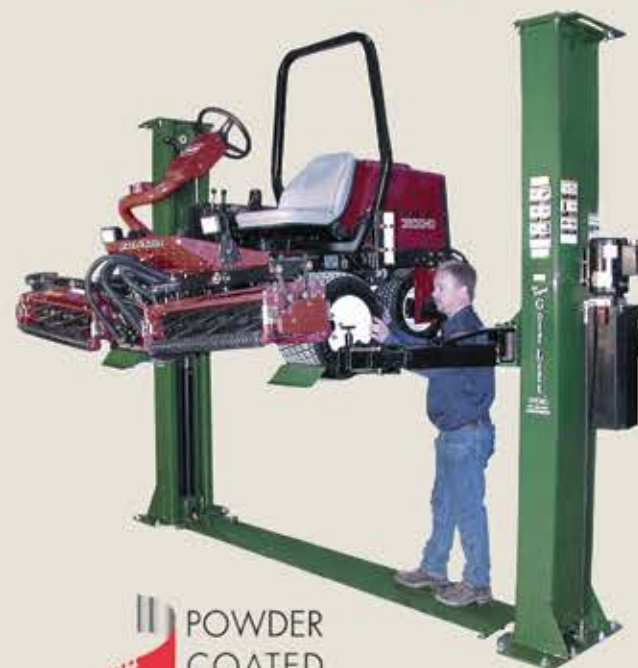

POWDER  
COATED  
**TOUGH™**



\*Arm pivots at the column and at the Tire-Wedge™ for direct connection to the tire.  
\*The telescopic arms easily adjust to wheelbase lengths.

## 5 Year Warranty

### Accessories Increase Productivity



GL-TA Frame/Truck Kit



**ISO-9001  
Certified Manufacturing**

### GL-TA Frame Kit, Quickly converts

The model GL-TA Frame/Truck Kit allows the GL-9 to quickly change into a Frame/Truck lift. Simply pull 2 pins to change from the Tire-Wedge turf arms to frame/truck arms in a couple of minutes. This option lifts by the frame for wheels free access on Gators, Cushmans, Workmans, and Golf Carts as well as cars and trucks with up to 9,000-lb capacity.

### Safety

The GL-9 is certified to the rigid OSHA recognized ANSI/ALI ALCTV-2006 turf/auto lift standard. To validate this claim, ALI requires the lift to be 3rd party tested by the nationally recognized ETL testing lab and engineers. The GL-9 passed this validation process and has earned the right to wear the ALI/ETL Gold Label (see front page). Here are a few of the required safety standards:

- \* Minimum safety factors include; 1.5:1 for the pumps, 3:1 for ductile metal strength, valves, fittings & cylinders and 4:1 for hoses & fasteners.
- \* Lift is physically loaded and tested to 1.5 times the rated load capacity.
- \* The lifts must include installation and operating manuals with inspection and maintenance instructions.
- \* Standardized safety labels are installed and auto lifting point information is included.

### Nothing Else Compares

#### SPECIFICATIONS:

GL-9	No Overhead Beam
Style	
Capacity for Turf	9000 lbs.
Capacity for Truck	9000 lbs
Lifting Height	72"
Overall Height	111"
Overall Width	138"
Width between posts	111"
Max. Tread Width -Turf	98"
Max Wheel Base - Turf	90"
Max Wheel Base-Truck	172"
Power Unit 2 HP 1PH, 208-230V for 30 amp circuit. Concrete minimum 4" thickness minimum 3000 PSI.	

©Copyright 1997-2009 Derek Weaver Co., Inc.

Golf-Lift® is a registered trademark of Derek Weaver Co., Inc.

Tire-Wedge™ is a trademark of Derek Weaver Co., Inc.

Specifications subject to change without notice

# Raise Your Productivity and Lower Your Downtime

Phone

800-788-9789

E-mail

sales@golf-lift.com

Web

www.golf-lift.com