



FLEX800™ 35/55 SERIES GOLF ROTORS



The New FLEX800 35/55 Series features a dual trajectory main nozzle that provides exceptional nozzle performance at the 25° standard angle position and great performance in windy applications at the 15° low angle position. And the part/full circle drive allows you to adjust the area of coverage to match your seasonal watering needs or meet water rationing mandates in seconds with no additional parts required.

Features & Benefits

Industry's Largest Nozzle Selection

Nozzles from 43' to 92' radius plus a wide assortment of back nozzles lets you put the precise amount of water exactly where you need it. All nozzles threaded in from front.

Stainless Steel Valve Seat

Eliminates body damage from rocks and debris. This in-destructible stainless steel seat is molded to the body and virtually eliminates body replacements due to seat damage.

Optional Radius Reduction Screw

Allows for fine tuning the radius to exactly the distance you need. In combination with main nozzle sizing and trajectory adjustment the radius reduction screw can effectively reduce the sprinkler throw down to 30'.


True Part and Full-Circle in One – (40° - 330° part circle)

These sprinklers can be full circle today and part circle tomorrow allowing you to adjust the area of coverage to match your seasonal needs or meet water rationing mandates.



FLX35

FLX55

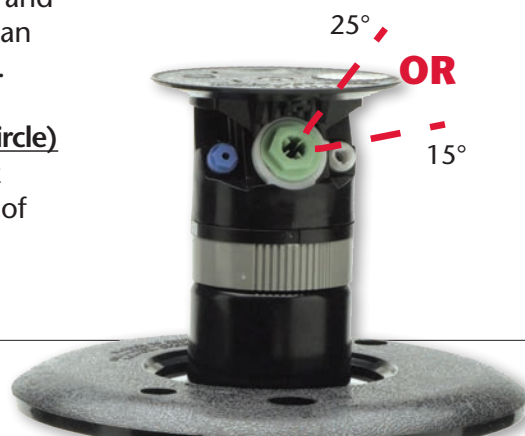

































Dual Trajectory
The 25° setting provides maximum distance of throw and the 15° setting provides improved wind performance, radius reduction and obstacle avoidance.



FLEX800™ 35/55 SERIES GOLF ROTORS

FLX35 Series Performance Chart—25°

Front Nozzle Positions	Nozzle Set 30  (White Plug)		Nozzle Set 31  (Yellow)		Nozzle Set 32  (Blue)		Nozzle Set 33  (Brown)		Nozzle Set 34  (Orange)		Nozzle Set 35  (Green)		Nozzle Set 36  (Gray)		Nozzle Set 37  (Black)	
	102-2208		102-6906		102-0726		102-6907		102-0728		102-6955		102-6935		102-6936	
																
	102-5670	102-6942	102-5670	102-5671	102-5670	102-6884	102-5670	102-6884	102-5670	102-6884	102-5670	102-6885	102-6531	102-6885	102-6531	102-6885
Back Nozzle Positions																
	Red Plug		Red Plug		Red Plug		Red Plug		Red Plug		Red Plug		Red Plug		Red Plug	
	102-4335		102-4335		102-4335		102-4335		102-4335		102-4335		102-4335		102-4335	
	PSI	Radius	GPM	Radius	GPM	Radius	GPM	Radius	GPM	Radius	GPM	Radius	GPM	Radius	GPM	Radius
50	43	8.2	53	13.8	56	18.3	61	21.7	65	25.3	—	—	—	—	—	—
65	45	10.0	53	15.5	59	20.5	64	24.4	68	28.2	72	34.1	—	—	—	—
80	46	11.5	57	17.3	62	22.7	67	27.1	71	31.1	75	37.8	78	40.3	80	44.0
100	47	13.4	59	19.1	65	24.9	70	29.8	74	34.1	79	40.9	81	43.8	83	47.3

FLX35 Series Performance Chart—15°




































PSI	Radius	GPM	Radius	GPM	Radius	GPM	Radius	GPM	Radius	GPM	Radius	GPM	Radius	GPM	Radius	GPM
50	43	8.2	52	13.6	58	18.1	61	21.5	62	25.6	—	—	—	—	—	—
65	45	10.0	54	15.3	60	20.3	64	24.2	65	27.3	69	33.1	—	—	—	—
80	46	11.5	58	17.2	64	22.6	69	26.8	69	30.2	75	36.8	76	39.7	76	42.9
100	47	13.4	60	19.0	66	24.7	71	29.5	72	32.9	78	39.5	82	42.6	82	46.1
Stator	102-6929 Blue		102-1939 Yellow						102-1940 White							
Conversions	FLX35-3134						FLX35-3537									

Not recommended at these pressures. Radius shown in feet.
 Toro recommends the use of a 1¼" swing joint at flows over 25-GPM (95-LPM). Sprinkler radius data collected in Toro's zero wind test facility per ASAE standard S398.1.
 Actual site conditions must be considered when selecting the appropriate nozzle.
 All sprinklers are equipped with the selectable pilot valve that allows settings at 50, 65, 80 and 100 PSI.

FLX35 Nozzle Apex

Pressure	Nozzle	Apex at 15°	Apex at 25°
65 PSI	31	6' @ 51'	13' @ 54'
	32	6' @ 51'	11' @ 64'
	33	7' @ 59'	13' @ 68'
	34	8' @ 63'	15' @ 74'
	35	9' @ 66'	15' @ 76'
80 PSI	36	8' @ 75'	18' @ 83'
	37	9' @ 74'	19' @ 82'

FLX55 Series Performance Chart—25°

Front Nozzle Positions	Nozzle Set 51  (Yellow)		Nozzle Set 52  (Blue)		Nozzle Set 53  (Brown)		Nozzle Set 54  (Orange)		Nozzle Set 55  (Green)		Nozzle Set 56  (Gray)		Nozzle Set 57  (Black)		Nozzle Set 58  (Red)		Nozzle Set 59  (Beige)	
	102-6906		102-0726		102-6907		102-0728		102-6955		102-6935		102-6936		102-6909		102-4259	
																		
	102-5670	102-5671	102-5670	102-6884	102-5670	102-6884	102-5670	102-6884	102-5670	102-6885	102-6531	102-6885	102-6531	102-6885	102-6531	102-6885	102-6531	102-6885
Back Nozzle Positions																		
	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug	Red Plug
	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335	102-4335
PSI	Radius	GPM	Radius	GPM	Radius	GPM	Radius	GPM	Radius	GPM	Radius	GPM	Radius	GPM	Radius	GPM	Radius	GPM
50	55	14.1	57	18.5	62	22.3	66	25.8	—	—	—	—	—	—	—	—	—	—
65	57	15.8	60	20.9	65	25.1	69	28.7	73	35.9	—	—	—	—	—	—	—	—
80	59	17.5	61	23.1	68	27.8	72	31.7	76	39.7	80	43.1	83	48.2	85	50.0	89	57.5
100	61	19.3	63	25.3	71	30.3	75	34.5	80	43.5	83	49.0	88	51.5	90	53.9	92	61.3

FLX55 Series Performance Chart—15°

PSI	Radius	GPM	Radius	GPM	Radius	GPM	Radius	GPM	Radius	GPM	Radius	GPM	Radius	GPM	Radius	GPM	Radius	GPM
50	55	14.0	59	16.5	62	22.2	63	25.6	—	—	—	—	—	—	—	—	—	—
65	56	15.6	62	20.7	65	25.0	66	28.5	75	35.3	—	—	—	—	—	—	—	—
80	59	17.4	66	23.0	69	27.7	70	31.5	78	39.0	78	42.4	79	46.9	79	49.5	82	57.2
100	60	19.2	68	25.1	71	30.2	72	34.3	80	41.9	81	47.2	83	52.1	83	53.4	85	60.8
Stator	102-1939 Yellow								102-1940 White						102-1941 White			
Conversions	FLX55-5154								FLX55-5558						FLX55-59			

■ Not recommended at these pressures. Radius shown in feet.
 Toro recommends the use of a 1¼" swing joint at flows over 25-GPM (95-LPM). Sprinkler radius data collected in Toro's zero wind test facility per ASAE standard S398.1.
 Actual site conditions must be considered when selecting the appropriate nozzle.
 All sprinklers are equipped with the selectable pilot valve that allows settings at 50, 65, 80 and 100 PSI.

FLX55 Nozzle Apex

Pressure	Nozzle	Apex at 15°	Apex at 25°
65 PSI	51	6' @ 51'	13' @ 54'
	52	6' @ 51'	11' @ 64'
	53	7' @ 59'	13' @ 68'
	54	8' @ 63'	15' @ 74'
	55	9' @ 66'	15' @ 76'
80 PSI	56	8' @ 75'	18' @ 83'
	57	9' @ 74'	19' @ 82'
	58	10' @ 82'	18' @ 87'
	59	11' @ 81'	21' @ 91'

Main Nozzle Adapter Performance Charts Intermediate Nozzle Performance Charts

102-2929 Beige		Trajectory		30°		25°		20°		15°		10°		7°	
Pressure		Flow		Radius		Radius		Radius		Radius		Radius		Radius	
PSI	BAR	GPM	lpm	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters
50	3.4	8.1	30.7	53	17.4	52	17.1	50	16.4	48	15.7	45	14.8	42	13.8
60	4.1	8.9	33.7	57	18.7	56	18.4	53	17.4	51	16.7	47	15.4	45	14.8
65	4.5	9.3	35.2	58	19.0	56	18.4	54	17.7	51	16.7	49	16.1	46	15.1
70	4.8	9.6	36.3	59	19.4	57	18.7	56	18.4	53	17.4	50	16.4	48	15.7
80	5.5	10.3	39.0	61	20.0	60	19.7	58	19.0	56	18.4	53	17.4	50	16.4
90	6.2	10.9	41.3	63	20.7	61	20.0	59	19.4	57	18.7	54	17.7	51	16.7
100	6.9	11.5	43.5	65	21.3	63	20.7	60	19.7	58	19.0	55	18.0	51	16.7

102-2928 Red		Trajectory		30°		25°		20°		15°		10°		7°	
Pressure		Flow		Radius		Radius		Radius		Radius		Radius		Radius	
PSI	BAR	GPM	lpm	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters
50	3.4	6.3	23.8	53	17.4	51	16.7	48	15.7	46	15.1	43	14.1	40	13.1
60	4.1	7.0	26.5	55	18.0	53	17.4	50	16.4	48	15.7	45	14.8	42	13.8
65	4.5	7.2	27.3	56	18.4	54	17.7	52	17.1	49	16.1	47	15.4	44	14.4
70	4.8	7.5	28.4	57	18.7	55	18.0	53	17.4	51	16.7	49	16.1	46	15.1
80	5.5	8.0	30.3	59	19.4	58	19.0	56	18.4	54	17.7	52	17.1	49	16.1
90	6.2	8.5	32.2	60	19.7	58	19.0	57	18.7	55	18.0	53	17.4	50	16.4
100	6.9	9.0	34.1	61	20.0	59	19.4	57	18.7	55	18.0	53	17.4	50	16.4

102-2927 Gray		Trajectory		30°		25°		20°		15°		10°		7°	
Pressure		Flow		Radius		Radius		Radius		Radius		Radius		Radius	
PSI	BAR	GPM	lpm	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters
50	3.4	5.0	18.9	50	16.4	48	15.7	46	15.1	44	14.4	41	13.5	38	12.5
60	4.1	5.5	20.8	52	17.1	50	16.4	48	15.7	46	15.1	43	14.1	40	13.1
65	4.5	5.7	21.6	53	17.4	51	16.7	49	16.1	46	15.1	44	14.4	41	13.5
70	4.8	5.9	22.3	53	17.4	51	16.7	49	16.1	47	15.4	45	14.8	42	13.8
80	5.5	6.3	23.8	54	17.7	52	17.1	50	16.4	48	15.7	46	15.1	43	14.1
90	6.2	6.7	25.4	55	18.0	53	17.4	52	17.1	50	16.4	48	15.7	45	14.8
100	6.9	7.1	26.9	55	18.0	54	17.7	53	17.4	52	17.1	50	16.4	46	15.1

102-2926 Orange		Trajectory		30°		25°		20°		15°		10°		7°	
Pressure		Flow		Radius		Radius		Radius		Radius		Radius		Radius	
PSI	BAR	GPM	lpm	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters
50	3.4	4.3	16.3	48	15.7	46	15.1	44	14.4	42	13.8	39	12.8	35	11.5
60	4.1	4.7	17.8	50	16.4	48	15.7	46	15.1	44	14.4	41	13.5	38	12.5
65	4.5	4.9	18.5	51	16.7	49	16.1	47	15.4	45	14.8	42	13.8	39	12.8
70	4.8	5.1	19.3	51	16.7	50	16.4	48	15.7	46	15.1	43	14.1	40	13.1
80	5.5	5.4	20.4	52	17.1	51	16.7	50	16.4	48	15.7	45	14.8	42	13.8
90	6.2	5.8	22.0	53	17.4	52	17.1	51	16.7	49	16.1	47	15.4	44	14.4
100	6.9	6.1	23.1	54	17.7	53	17.4	52	17.1	50	16.4	48	15.7	45	14.8

102-2925 Blue		Trajectory		30°		25°		20°		15°		10°		7°	
Pressure		Flow		Radius		Radius		Radius		Radius		Radius		Radius	
PSI	BAR	GPM	lpm	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters
50	3.4	2.7	10.2	42	13.8	41	13.5	39	12.8	38	12.5	36	11.8	34	11.2
60	4.1	3.0	11.4	43	14.1	42	13.8	40	13.1	39	12.8	37	12.1	35	11.5
65	4.5	3.2	12.1	43	14.1	42	13.8	40	13.1	39	12.8	37	12.1	35	11.5
70	4.8	3.3	12.5	44	14.4	42	13.8	41	13.5	39	12.8	38	12.5	36	11.8
80	5.5	3.5	13.2	44	14.4	43	14.1	41	13.5	40	13.1	38	12.5	36	11.8
90	6.2	3.7	14.0	45	14.8	44	14.4	42	13.8	41	13.5	39	12.8	37	12.1
100	6.9	3.9	14.8	45	14.8	44	14.4	43	14.1	42	13.8	40	13.1	38	12.5

Main Nozzle Adapter Performance Charts

Intermediate Nozzle Performance Charts

102-6885 Green		Trajectory		30°		25°		20°		15°		10°		7°	
Pressure		Flow		Radius		Radius		Radius		Radius		Radius		Radius	
PSI	BAR	GPM	lpm	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters
50	3.4	5.4	20.4	51	16.7	50	16.4	48	15.7	45	14.8	42	13.8	39	12.8
60	4.1	5.9	22.3	52	17.1	51	16.7	49	16.1	46	15.1	43	14.1	41	13.5
65	4.5	6.1	23.1	52	17.1	51	16.7	50	16.4	47	15.4	44	14.4	42	13.8
70	4.8	6.3	23.8	53	17.4	52	17.1	50	16.4	47	15.4	44	14.4	42	13.8
80	5.5	6.7	25.4	53	17.4	52	17.1	51	16.7	48	15.7	45	14.8	43	14.1
90	6.2	7.1	26.9	54	17.7	53	17.4	52	17.1	50	16.4	47	15.4	45	14.8
100	6.9	7.4	28.0	55	18.0	55	18.0	54	17.7	52	17.1	49	16.1	47	15.4

102-6884 Yellow		Trajectory		30°		25°		20°		15°		10°		7°	
Pressure		Flow		Radius		Radius		Radius		Radius		Radius		Radius	
PSI	BAR	GPM	lpm	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters
50	3.4	4.1	15.5	48	15.7	47	15.4	45	14.8	41	13.5	38	12.5	35	11.5
60	4.1	4.5	17.0	49	16.1	48	15.7	47	15.4	44	14.4	41	13.5	38	12.5
65	4.5	4.7	17.8	50	16.4	49	16.1	48	15.7	45	14.8	42	13.8	39	12.8
70	4.8	4.8	18.2	50	16.4	49	16.1	48	15.7	45	14.8	43	14.1	40	13.1
80	5.5	5.1	19.3	51	16.7	50	16.4	49	16.1	47	15.4	44	14.4	41	13.5
90	6.2	5.4	20.4	53	17.4	52	17.1	50	16.4	48	15.7	45	14.8	42	13.8
100	6.9	5.8	22.0	54	17.7	53	17.4	51	16.7	49	16.1	46	15.1	43	14.1

102-6883 Brown		Trajectory		30°		25°		20°		15°		10°		7°	
Pressure		Flow		Radius		Radius		Radius		Radius		Radius		Radius	
PSI	BAR	GPM	lpm	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters
50	3.4	2.4	9.1	41	13.5	40	13.1	38	12.5	36	11.8	33	10.8	30	9.8
60	4.1	2.6	9.8	43	14.1	42	13.8	40	13.1	38	12.5	36	11.8	33	10.8
65	4.5	2.7	10.2	44	14.4	42	13.8	41	13.5	39	12.8	37	12.1	34	11.2
70	4.8	2.8	10.6	45	14.8	43	14.1	42	13.8	40	13.1	38	12.5	35	11.5
80	5.5	3.0	11.4	46	15.1	45	14.8	43	14.1	41	13.5	40	13.1	36	11.8
90	6.2	3.2	12.1	46	15.1	45	14.8	44	14.4	42	13.8	41	13.5	37	12.1
100	6.9	3.4	12.9	46	15.1	45	14.8	44	14.4	43	14.1	41	13.5	38	12.5

Inner Nozzle Performance Charts*

102-6937 Yellow		Trajectory		30°		25°		20°	
Pressure		Flow		Radius		Radius		Radius	
PSI	BAR	GPM	lpm	Feet	Meters	Feet	Meters	Feet	Meters
50	3.4	3.7	14.0	26	8.5	24	7.9	20	6.6
60	4.1	4.0	15.1	28	9.2	25	8.2	22	7.2
65	4.5	4.2	15.9	28	9.2	25	8.2	22	7.2
70	4.8	4.4	16.7	28	9.2	26	8.5	23	7.5
80	5.5	4.7	17.8	28	9.2	26	8.5	24	7.9
90	6.2	5.0	18.9	29	9.5	27	8.9	25	8.2
100	6.9	5.2	19.7	30	9.8	29	9.5	27	8.9

102-6531 Green		Trajectory		30°		25°		20°	
Pressure		Flow		Radius		Radius		Radius	
PSI	BAR	GPM	lpm	Feet	Meters	Feet	Meters	Feet	Meters
50	3.4	4.0	15.1	32	10.5	30	9.8	26	8.5
60	4.1	4.3	16.3	34	11.2	31	10.2	27	8.9
65	4.5	4.5	17.0	34	11.2	31	10.2	27	8.9
70	4.8	4.7	17.8	34	11.2	31	10.2	28	9.2
80	5.5	5.0	18.9	34	11.2	32	10.5	29	9.5
90	6.2	5.3	20.1	34	11.2	32	10.5	29	9.5
100	6.9	5.6	21.2	35	11.5	33	10.8	30	9.8



Main Nozzle Adapter
P/N 118-1521

* Not recommended below 20°

FLX35 Conversion Upgrades

Models	Description
• FLX35-3134	FLX35 w/31–34 Nozzles (#3 Nozzle Installed)
• FLX35-3537	FLX35 w/35–37 Nozzles (#5 Nozzle Installed)
• FLX35-3134E	FLX35 w/31–34 Nozzles (#3 Nozzle Installed), Effluent
• FLX35-3537E	FLX35 w/35–37 Nozzles (#5 Nozzle Installed), Effluent



FLX55 Conversion Upgrades (Ribbed Body)

Models	Description
• FLX55-5154	FLX55 w/51–54 Nozzles (#3 Nozzle Installed)
• FLX55-5558	FLX55 w/55–58 Nozzles (#5 Nozzle Installed)
• FLX55-59	FLX55 w/59 Nozzle
• FLX55-5154E	FLX55 w/51–54 Nozzles (#3 Nozzle Installed), Effluent
• FLX55-5558E	FLX55 w/55–58 Nozzles (#5 Nozzle Installed), Effluent
• FLX55-59E	FLX55 w/59 Nozzle, Effluent
• 102-5011	690 Adapter allows you to upgrade any 690 with FLX55 conversions



FLX55 Conversion Upgrades (Ribless Body)

Models	Description
• FLX55-5154R	FLX55 w/51–54 Nozzles (#3 Nozzle Installed)
• FLX55-5558R	FLX55 w/55–58 Nozzles (#5 Nozzle Installed)
• FLX55-59R	FLX55 w/59 Nozzle
• FLX55-5154RE	FLX55 w/51–54 Nozzles (#3 Nozzle Installed), Effluent
• FLX55-5558RE	FLX55 w/55–58 Nozzles (#5 Nozzle Installed), Effluent
• FLX55-59RE	FLX55 w/59 Nozzle, Effluent



Operating Specifications

- Inlet:
 - FLX35: 1" ACME
 - FLX55: 1 1/2" ACME
- Radius:
 - FLX35: 43' – 83'
 - FLX55: 55' – 92'
- Flow Rate:
 - FLX35: 8.2 – 47.3 GPM
 - FLX55: 14.1 – 61.3 GPM
- Precipitation Rates:
 - FLX35: Minimum - .41"/hr; Maximum - .45"/hr
 - FLX55: Minimum - .46"/hr; Maximum - .58"/hr
- Pilot Valve: Selectable at 50, 65, 80 and 100 PSI
- Recommended Operating Pressure Range: 65-100 PSI (maximum – 150 PSI and minimum – 40 PSI)
- Activation types – Electric Valve-in-Head:
 - Standard Solenoid:
 - 24 VAC, 50/60 Hz
 - Inrush: 0.30 A
 - Holding 0.20 A
 - Spike Guard Solenoid:
 - 24 VAC, 50/60 Hz
 - Inrush: 0.12 A
 - Holding 0.10 A
 - Nickel-Plated Spike Guard Solenoid:
 - 24 VAC, 50/60 Hz
 - Inrush: 0.12 A
 - Holding 0.10 A
 - DC Latching Solenoid (DCLS):
 - Momentary low voltage pulse
 - Integrated GDC Module w/DCLS:
 - Momentary low voltage pulse

Additional Features

- FLX35 has eight nozzle variations (30, 31, 32, 33, 34, 35, 36 & 37)
- FLX55 has nine nozzle variations (51, 52, 53, 54, 55, 56, 57, 58 & 59)
- Three in-line nozzles, rotating stream pattern
- Two back nozzle positions
- Stator variations: 3
- Radius reduction screw 363-4839 for fine tuning
- Ratcheting riser
- Nozzle base clutching

Dimensions

- Body Flange Diameter:
 - FLX35-6: 6 1/2"
 - FLX55-6: 7 1/2"
- Body height:
 - FLX35: 10"
 - FLX55: 11 3/8"
- Weight:
 - FLX35-6: 2.89 lbs.
 - FLX55-6: 3.57 lbs.
- Weight-Integrated GDC
 - FLX35: 3.58 lbs.
 - FLX55: 4.26 lbs.
- Pop-up height to nozzle: 3 1/4"

Warranty

- Three years
- Five years when installed with Toro Swing Joints

Specifying Information—FLX35 & FLX55

FLXX5-XXX-X-7					
Body Inlet	Arc	Nozzle	Pressure Regulation*	Activation Type	Optional
FLXX	5	XX	X	X	7
3—1" 5—1 1/2"	5—Part-circle and Full-circle In One	FLX35—30, 31, 32, 33, 34, 35, 36, 37 FLX55—51, 52, 53, 54, 55, 56, 57, 58, 59	6—65 PSI 8—80 PSI 1—100 PSI	1—Standard Solenoid 2—Spike Guard™ Solenoid 3—Nickel-plated Spike Guard Solenoid 4—DC Latching Solenoid (DCLS) 5—Integrated GDC Module w/DCLS	7—Effluent

Example: When specifying an FLX35 Series Sprinkler with #34 nozzle, pressure regulation at 65 PSI and Spike Guard you would specify: **FLX35-346-2**

Note: Not all models available.

* All sprinklers are equipped with the selectable pilot valve that allows settings at 50, 65, 80 and 100 PSI.