



VERTI-CUTTER

Specializing in Use on Golf Courses and Sports Fields

The VC60 Verti-cutter is designed for continuous heavy duty operation on golf course fairways, tees, and all types of sports fields. The unit has a unique swing hitch that allows the operator to verticut around objects while turning. Pivot points designed in the hitch allow the unit to float over uneven terrain. When the unit is lifted, it automatically centers itself and locks for transporting. These hitch features allow deep cutting with minimal turf disturbance. The removal of thatch and other dead plant material allows more room for growth, nutrients and chemicals creating healthier turf.



SKID OPTION



The depth gauge skids are directly centered under the shaft allowing the skids to float over undulations without losing depth. The skids are preferred in southern type turfs such as Bermuda and zoysia. The replaceable skids systems are made of durable polypropylene.



ROLLER OPTION




The double roller depth gauge system allows for consistent depth control over undulations. The roller offers two big improvements, it prevents marring of the turf and eliminates the forward and rear edge of the skids from digging or pushing up turf which is common in bent grass. With rollers, you can have the option for 1.5" spacing. The rollers are favored in northern turf such as bent grass


SPECIFICATIONS



**Easy
"No-Tools"
Adjustable
Depth Gauge**

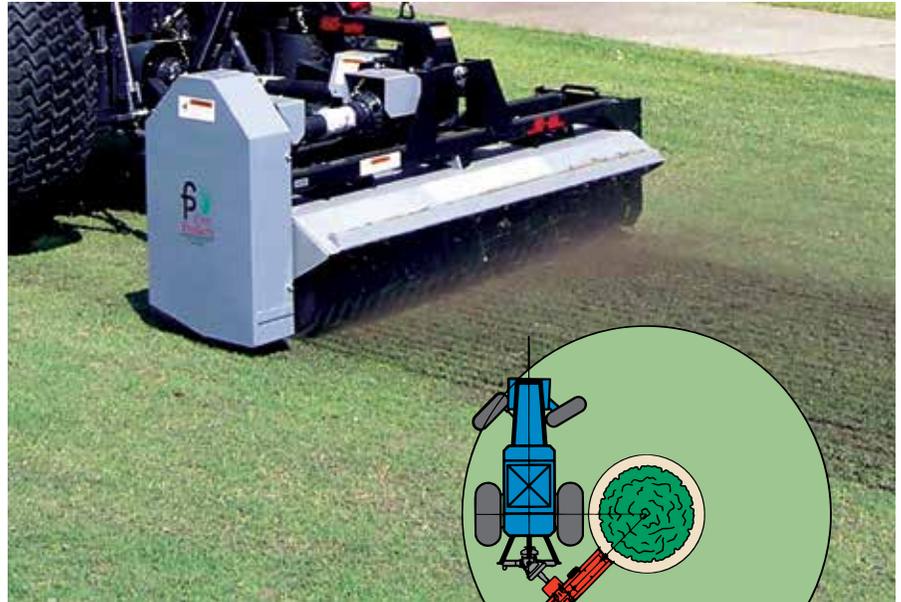

**Swing Hitch allows unit
to turn, without tearing
the established turf.**

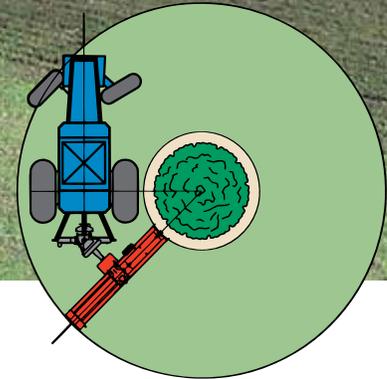

MODEL	VC-60
WORKING WIDTH	54" BLADE TO BLADE
STEEL BLADE	(28) 10GA/12 POINT 12" DIA HARDENED STEEL or
CARBIDE TIP BLADE	(28) 10GA/12 POINT 12" DIAMETER CARBIDE TIP BLADE
ROLLERS	1.5" or 2"
SKIDS	2" Only
BLADE SHAFT	1 5/8" HEX STRESS PROOF SHAFT
BLADE SHAFT ROTATION	FORWARD
BLADE DEPTH	0"-1 1/2"
BLADE DEPTH ADJUSTMENT	DETENT PINS ON SKIDS 3/16" INCREMENTS
HITCH	PATENTED 3-PT. CAT. 1 TRAILING HITCH
DRIVE	540 PTO GEARBOX, (5) BX BELTS TO BLADE SHAFT
REQUIRED HORSE POWER	25 TO 45 HP (VARIES BY CUTTING DEPTH)
FRAME	ALL WELDED STEEL CONSTRUCTION
WEIGHT	825 LBS.
DIMENSIONS	70" WIDTH, 46" LENGTH, 41" HIGH
GEARBOX	HEAVY DUTY 42 HP (31 KW)



**164 Oakridge Church Road
Tifton, GA 31794
229.382.4768 or 800.363.8780
www.1stproducts.com**

First Products, Inc. has a company policy of continuous improvements and development; therefore specifications are subject to change without notice. The company accepts no responsibility for discrepancies in specifications contained in this publication.

Patent No(s): 7,428,874; 8,640,784; 7,677,324